

UNIMOTION

STEPPER SYSTEMS
MOTORS, DRIVES,
CABLES

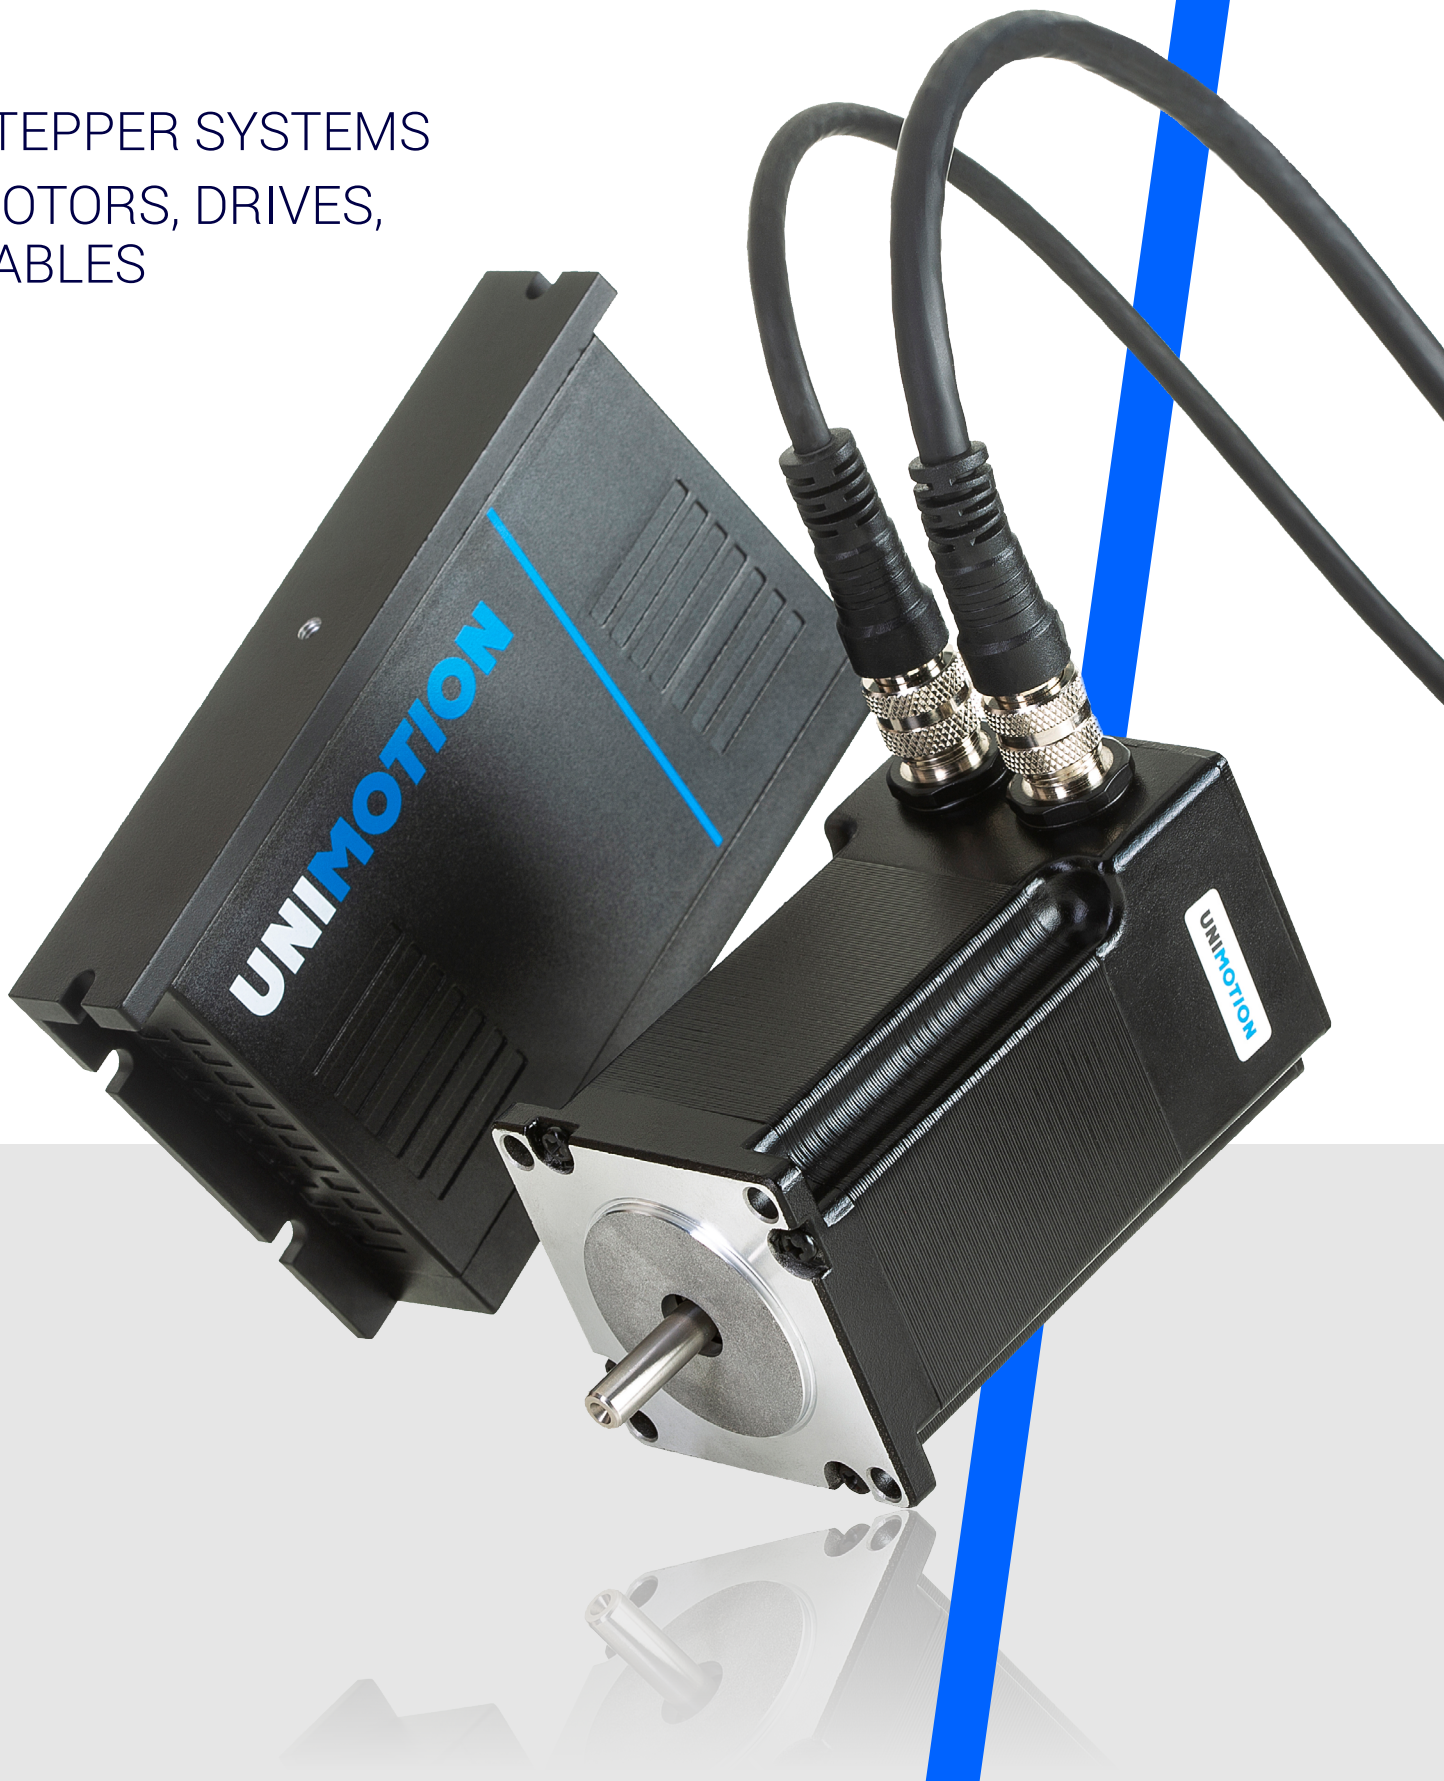


Table of Contents

General overview	4
Possible drive-motor-cable combinations	5
Speed-torque characteristics of possible drive-motor combinations	6
Connections showcase	6
Drives	7
How to order	8
Pulse-Direction	8
EtherCAT	12
Ethernet	16
Motors	20
How to order	21
STMN-42-L-E(-B)	23
STMN-56-L-E(-B)	23
Cables	25
How to order	26
Power cable	27
Signal cable	27
Drive-to-motor cables	29

General overview

Possible drive-motor-cable combinations	5
Speed-torque characteristics of possible drive-motor combinations	6
Connections showcase	6

UNIMOTION stepper motors and drives offer a simple Plug & Drive solution for precise automation, available with Ethernet, EtherCAT and Pulse-direction communication so that each application can be personalised according to individual specifications.



POSSIBLE DRIVE-MOTOR-CABLE COMBINATIONS


In the following table, available motor-drive-cable combinations are shown.

Stepper motor			Drive		Driver-to-motor cable		
Size [mm]	Brake	Code	Protocol/control	Code	Motor	Brake	Encoder
□42	–	STMN-42-L-E	EtherCAT	STDF-42-A-EC	STCF-M_12-...	-	STCF-E_12-...
			Ethernet	STDF-42-A-EN			
			Pulse-direction	STDF-42-A-PD			
	with	STMN-42-L-E-B	EtherCAT	STDF-42-A-EC		STCF-B_8-...	
			Ethernet	STDF-42-A-EN			
			Pulse-direction	STDF-42-A-PD			
□56	–	STMN-56-L-E	EtherCAT	STDF-56-A-EC		-	
			Ethernet	STDF-56-A-EN			
			Pulse-direction	STDF-56-A-PD			
	with	STMN-56-L-E-B	EtherCAT	STDF-56-A-EC		STCF-B_8-...	
			Ethernet	STDF-56-A-EN			
			Pulse-direction	STDF-56-A-PD			


SPEED-TORQUE CHARACTERISTICS OF POSSIBLE DRIVE-MOTOR COMBINATIONS

i On the following diagrams, torque as a function of speed is presented for each motor with an appropriate drive.

STMN-42-L-E(-B) with STDF-42-A-..

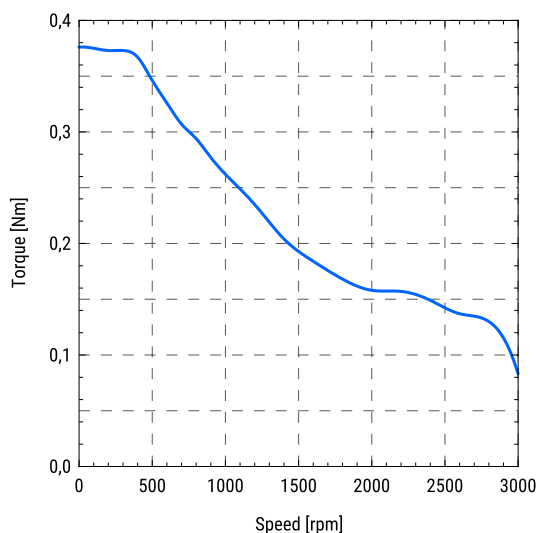


STMN-56-L-E(-B) with STDF-56-A-..

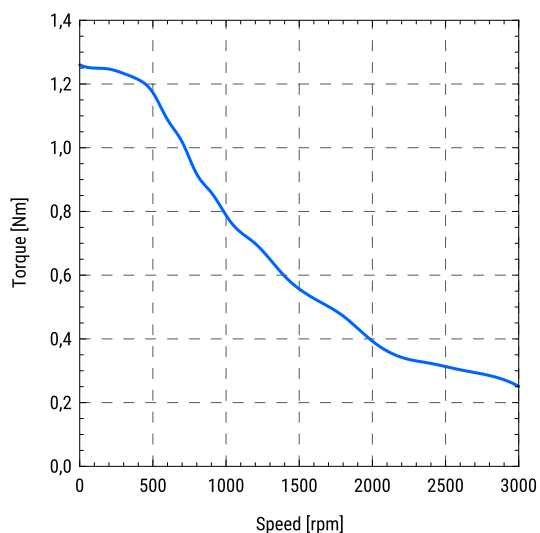

CONNECTIONS SHOWCASE


No.	Accessories	Page
1	Motor	20
2	Drive	7
3	Motor cable	30
4	Brake cable	30
5	Signal cable	27
6	Power cable	27
7	Encoder cable	29

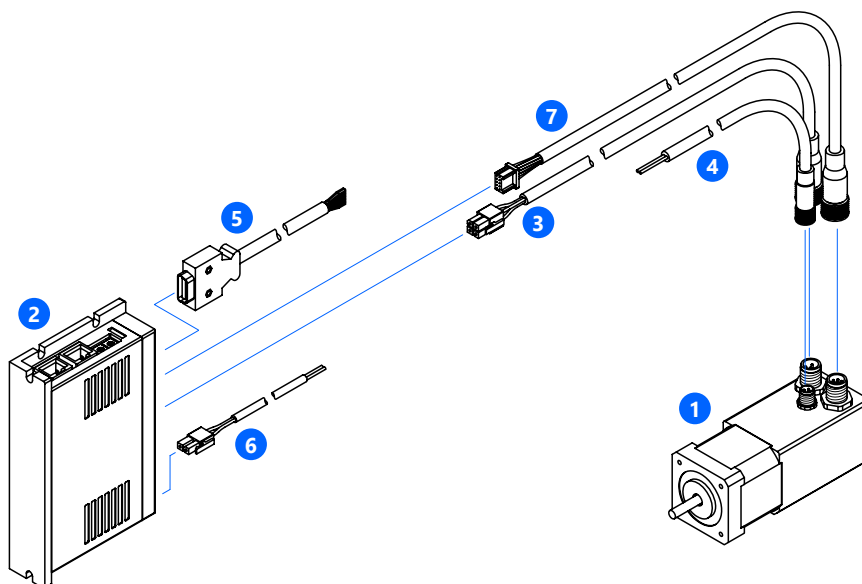

Drives

How to order	8
Pulse-Direction	8
EtherCAT	12
Ethernet	16

HOW TO ORDER

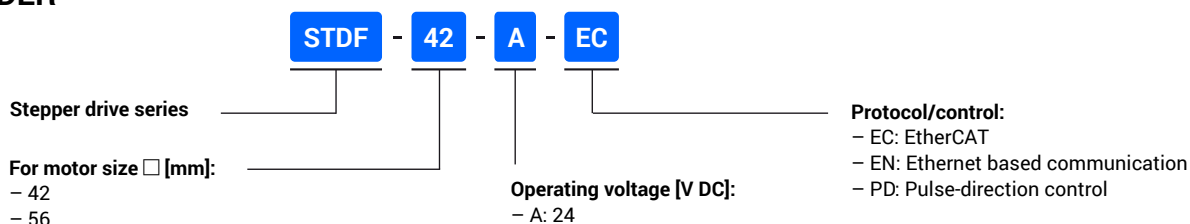

PULSE-DIRECTION

Description

Pulse-direction refers to a type of digital signalling, used in position control. There are two types of pulse control:

1. 1-signal mode (Pulse/Mode)
2. 2-signal mode (CW/CCW)

This mode has CW and CCW inputs. The pulse at these inputs determines whether the motor rotates clockwise or counterclockwise.


It contains two signals, one for distance and speed, and the other for the direction of rotation. The actual movement is carried out by pulses received from the controller, i.e. can be arbitrarily set to be for one revolution of the motor, 1000 pulses.

Other advantages are:

- No gain tuning / No hunting
- Heat reduction / Torque improvement
- Up to 3000 rpm
- Plug & Drive (no tuning necessary)
- Brake control
- DIN rail mounting option
- RoHS directive
- EMC directive



Dimensions

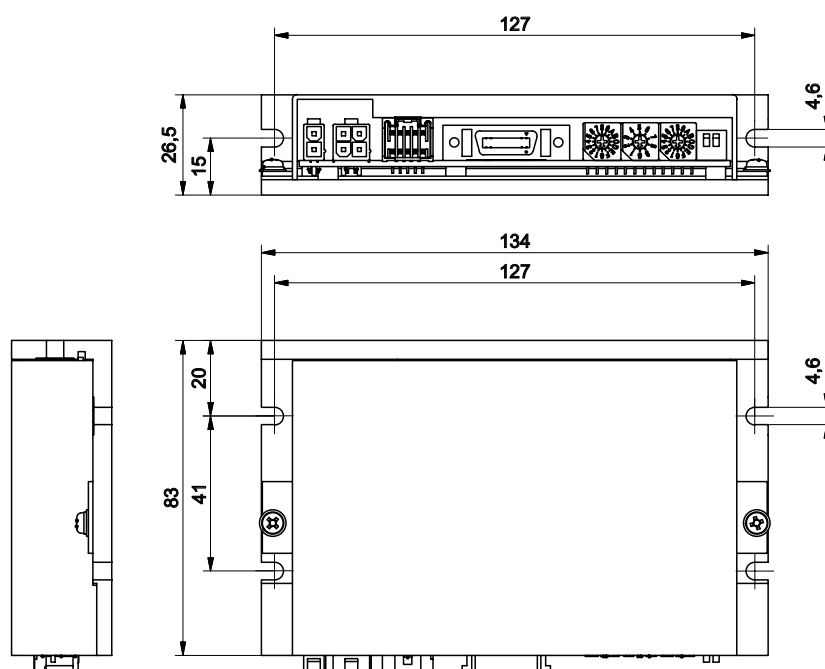


i All dimensions are in mm.
The scale of the drawings
may not be equal.

General technical data

PARAMETER	Type	Stepper drive
	Protocol/control	Pulse-direction control
	Code	STDF-PD
	UNIT	VALUE
Operating voltage	[V DC]	24 ± 10 %
Current consumption ¹	[mA]	max. 500
Rotational speed	[rpm]	0 ~ 3000
Supported resolution ²	[ppr]	500, 1000, 1600, 2000, 3600, 5000, 7200, 10000
Input signals		Position command pulse
		Servo on/off
		Alarm reset (Photocoupler input)
Output signals		In-position
		Alarm (Photocoupler output)
		Encoder signal, brake
Ambient temperature	[°C]	0 ~ +50
Ambient humidity	[%]	35 ~ 80 (non-condensing)
Vibration resistance	[G]	0,5
Duty cycle	[%]	100

¹ Except the motor current.
² For the case that resolution is higher than the encoder's resolution, the motor shall operate by micro-step between pulses.


Port and indicator information

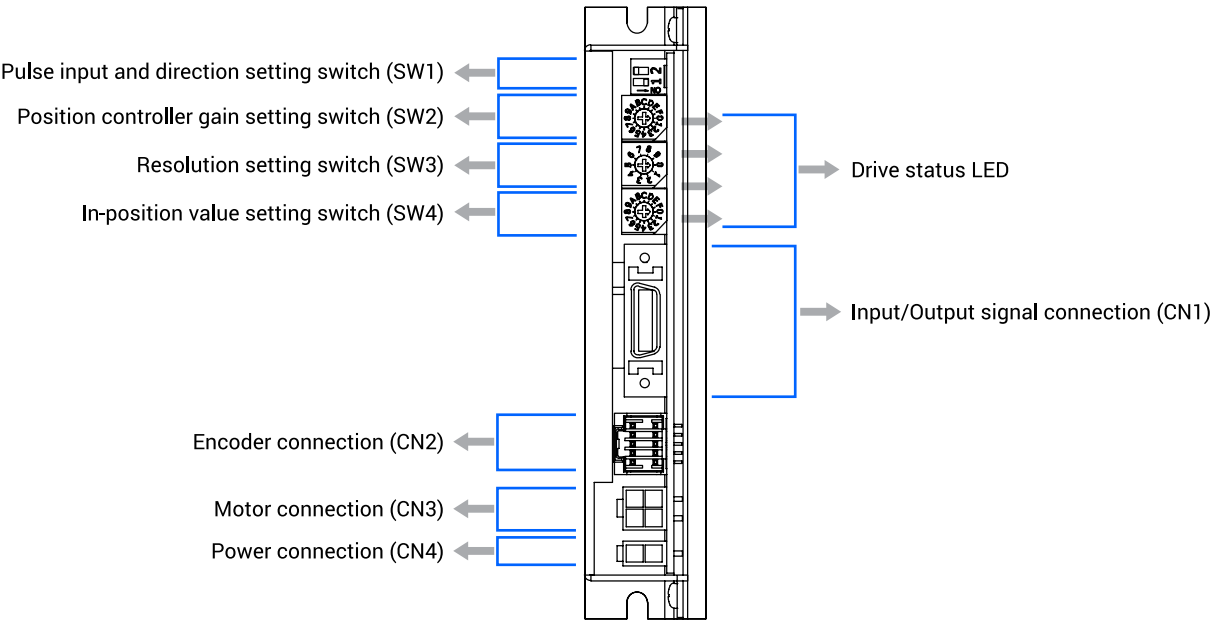

Pin layout


Input/Output signal connector (CN1):

No.	Function	I/O
1	CW+ (Pulse+)	Input
2	CW- (Pulse-)	Input
3	CCW+ (Dir+)	Input
4	CCW- (Dir-)	Input
5	A+	Output
6	A-	Output
7	B+	Output
8	B-	Output
9	I+	Output
10	I-	Output
11	Alarm	Output
12	In-position	Output
13	Servo on/off	Input
14	Alarm reset	Input
15	Open collector input	Input
16	BRAKE+	Output
17	BRAKE-	Output
18	S-GND	Output
19	EXT_GND	Input
20	EXT_24VDC	Input



Motor connector (CN3):

No.	Function	I/O
1	A+ Phase	Output
2	B+ Phase	Output
3	A- Phase	Output
4	B- Phase	Output




Power connector (CN4):

No.	Function	I/O
1	24 V (DC)	Input
2	GND	Input




Encoder connector (CN2):

No.	Function	I/O
1	A+	Input
2	A-	Input
3	B+	Input
4	B-	Input
5	I+	Input
6	I-	Input
7	5 V (DC)	Output
8	GND	Output
9	F.GND	-
10	F.GND	-



External wiring diagram

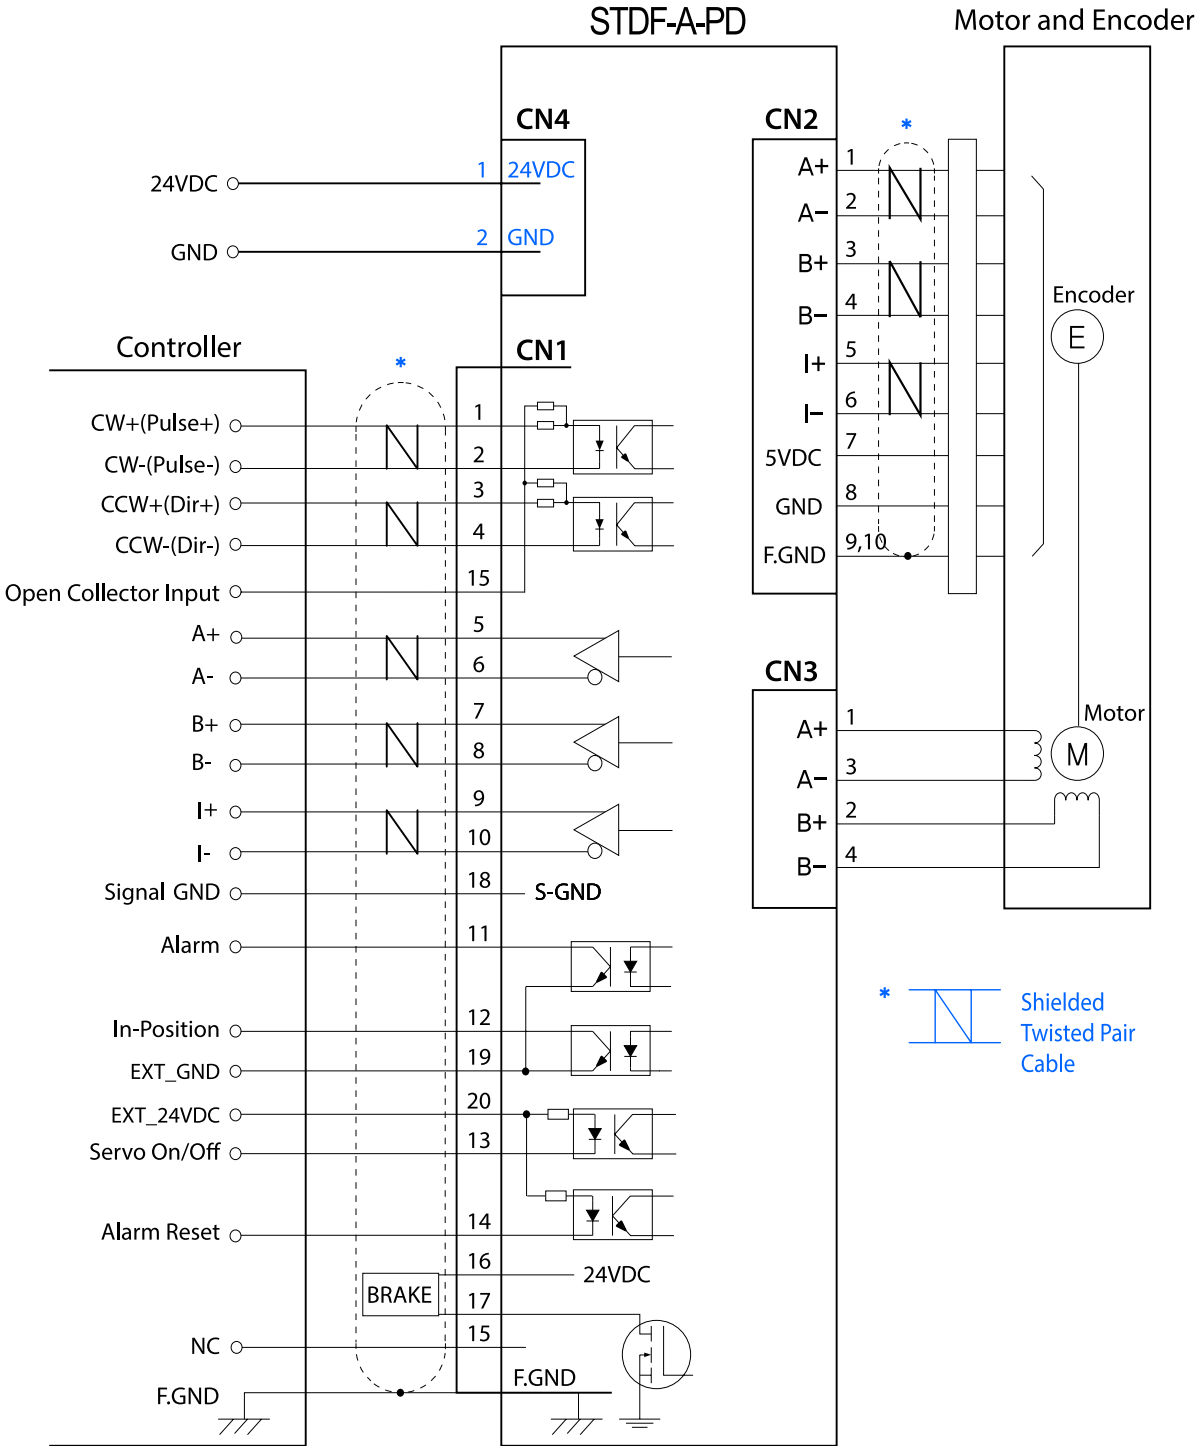

※ When connecting the I/O cables between the controller and drive, please turn off the power of both controller and drive to protect the drive from any damage.

CAUTION

Please refer to the Manual when connecting the motor extension cable.

Carefull connection will be required to protect the drive from any damages.

ETHERCAT

Description


EtherCAT is the fastest Industrial Ethernet technology. This is a huge benefit for all applications in which the target system is controlled or measured via the bus system. The rapid reaction times work to reduce the wait times during the transitions between process steps, which significantly improves application efficiency.

Other advantages:

- CiA 402 Drive Profile Support
- Closed Loop System (errors are corrected)
- No Gain Tuning / No Hunting
- Heat Reduction / Torque Improvement
- Up to 3000 rpm
- Plug & Drive (no tuning necessary)
- Brake control
- DIN rail mount option
- RoHS directive
- EMC directive



Dimensions

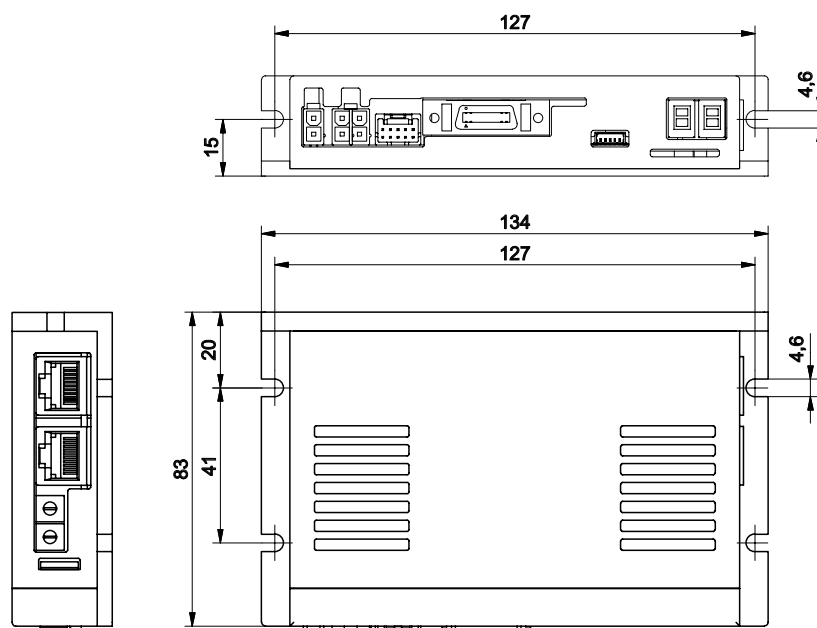


i All dimensions are in mm.
The scale of the drawings
may not be equal.

General technical data

PARAMETER	Type	Stepper drive
	Protocol/control	EtherCAT
	Code	STDF-EC
	UNIT	VALUE
Operating voltage	[V DC]	24 ± 10 %
Current consumption ¹	[mA]	max. 500
Rotational speed	[rpm]	0 ~ 3000
Supported resolution ²	[ppr]	500, 1000, 1600, 2000, 3600, 5000, 7200, 10000
Input signals		3 dedicated inputs (LIMIT+, LIMIT-, ORIGIN)
		7 user inputs (Photocoupler)
Output signals		6 user outputs (Photocoupler)
		Brake
Ambient temperature	[°C]	0 ~ +50
Ambient humidity	[%]	35 ~ 80 (non-condensing)
Vibration resistance	[G]	0,5
Duty cycle	[%]	100

¹ Except the motor current.
² For the case that resolution is higher than the encoder's resolution, the motor shall operate by micro-step between pulses.


Port and indicator information

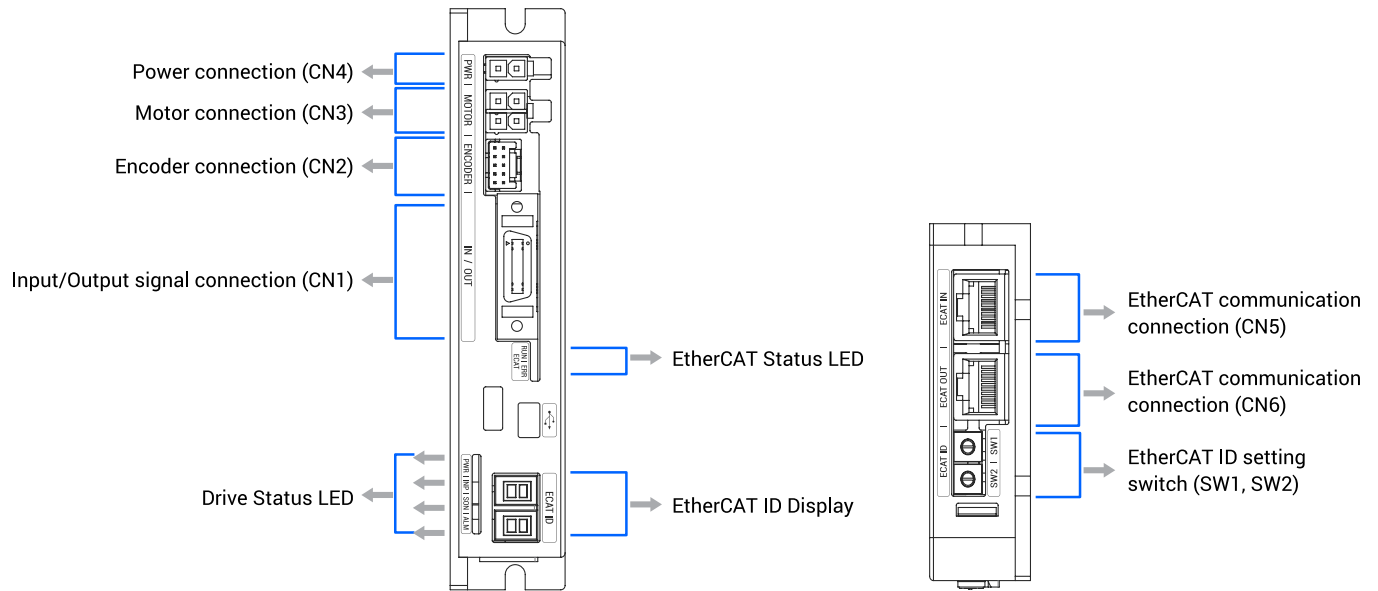

Pin layout


Input/Output signal connector (CN1):

No.	Function	I/O
1	LIMIT+	Input
2	LIMIT-	Input
3	ORIGIN	Input
4	Digital In1	Input
5	Digital In2	Input
6	Digital In3	Input
7	Digital In4	Input
8	Digital In5	Input
9	Digital In6	Input
10	Digital In7	Input
11	Digital Out1	Output
12	Digital Out2	Output
13	Digital Out3	Output
14	Digital Out4	Output
15	Digital Out5	Output
16	Digital Out6	Output
17	BRAKE+	Output
18	BRAKE-	Output
19	EXT_GND	Input
20	EXT_24VDC	Input




EtherCAT ID display and settings switch (SW1, SW2):

There are two rotary switches for setting the value of the EtherCAT ID (ECAT Device ID) on the side of the device. The right switch (SW1) sets the »ones« (X1), while the switch on the left (SW2) sets the »tens« (X10). Set values are displayed on »ECAT ID« segment display.

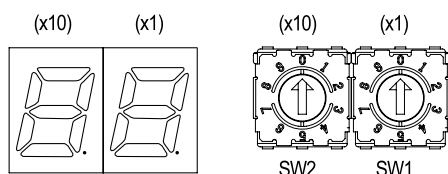


Encoder connector (CN2):

No.	Function	I/O
1	A+	Input
2	A-	Input
3	B+	Input
4	B-	Input
5	I+	Input
6	I-	Input
7	5 V (DC)	Output
8	GND	Output
9	F.GND	-
10	F.GND	-



Motor connector (CN3):

No.	Function	I/O
1	A+ Phase	Output
2	B+ Phase	Output
3	A- Phase	Output
4	B- Phase	Output




Power connector (CN4):

No.	Function	I/O
1	24 V (DC)	Input
2	GND	Input




EtherCAT communication connector (CN5, CN6):

No.	Function
1	TD+
2	TD-
3	RD+
4	-
5	-
6	RD-
7	-
Connection hood	F.GND



External wiring diagram

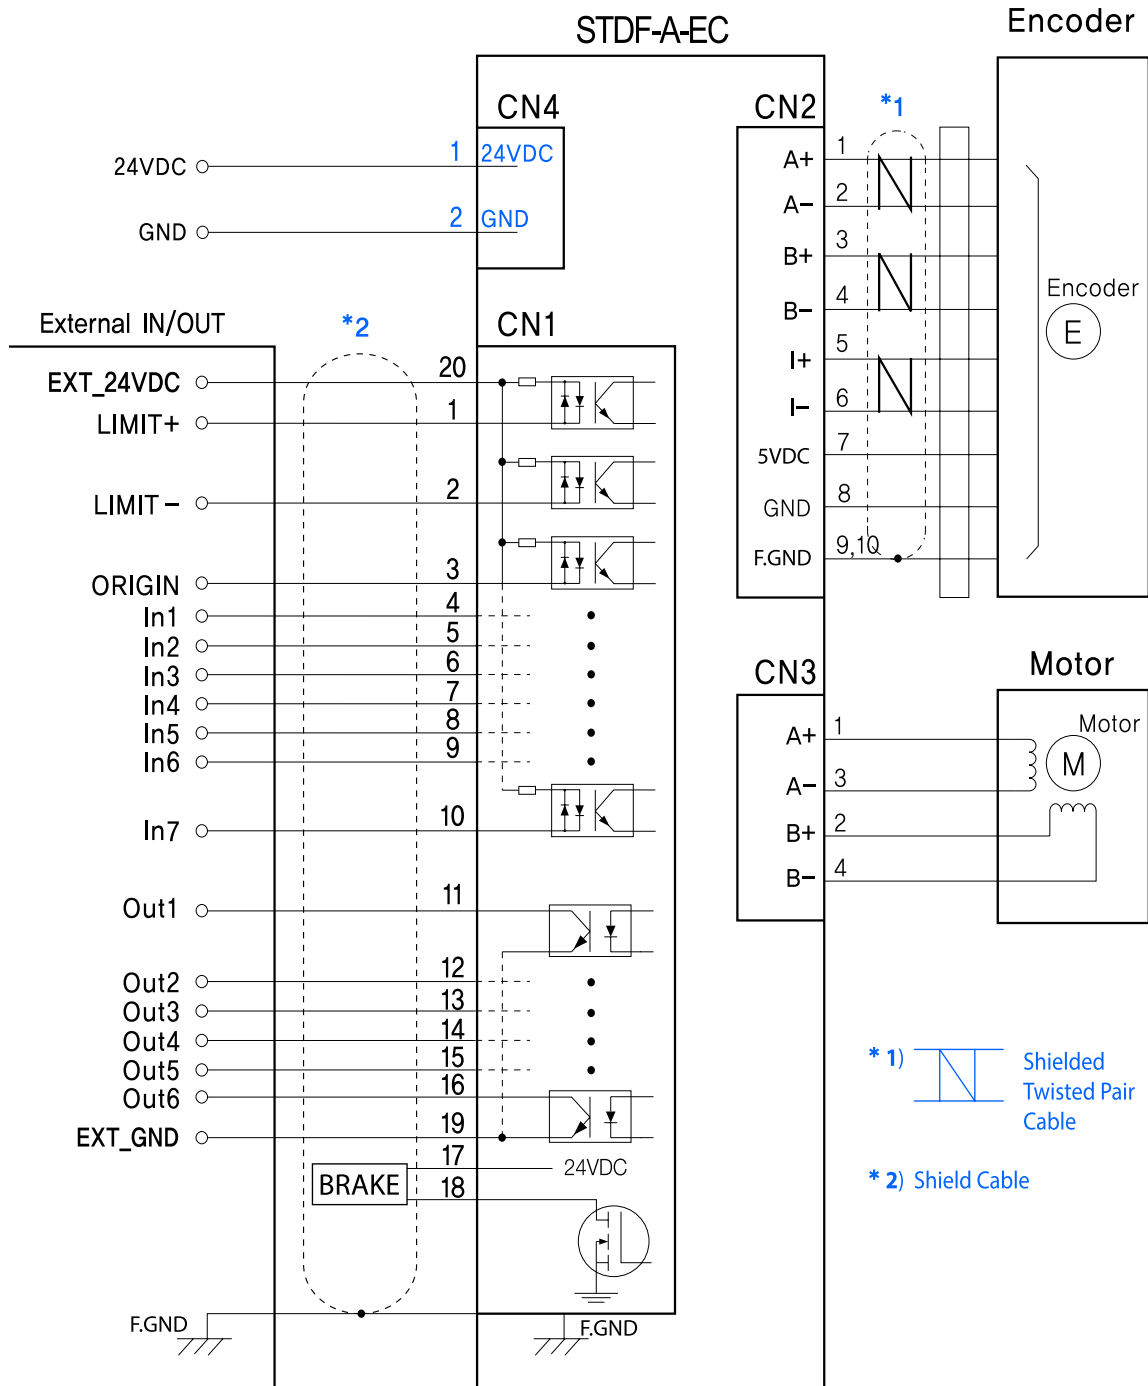

※ When connecting the I/O cables between the controller and drive, please turn off the power of both controller and drive to protect the drive from any damage.

CAUTION

Please refer to the Manual when connecting the motor extension cable.

Carefull connection will be required to protect the drive from any damages.

ETHERNET

Description


Ethernet is the standard communication protocol used to connect devices. It is the most widely used technology for local area networking and allows TCP or UDP protocol for sending data (possible to control it with Siemens S7 PLC).

Other advantages:

- Closed Loop System (errors are corrected)
- No Gain Tuning / No Hunting
- Heat Reduction / Torque Improvement
- Up to 3000 rpm
- Plug & Drive (no tuning necessary)
- Brake control
- DIN rail mount option
- RoHS directive
- EMC directive



Dimensions

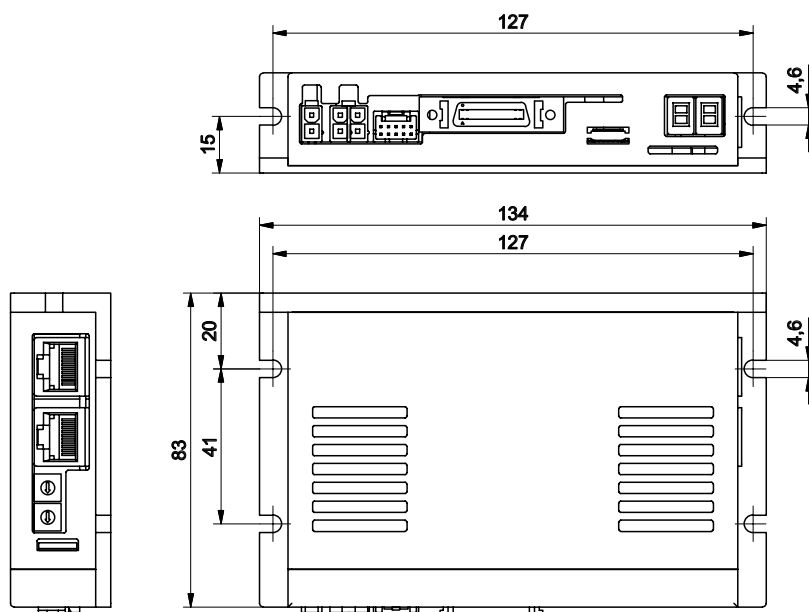

i All dimensions are in mm.
The scale of the drawings
may not be equal.


General technical data

PARAMETER	Type	Stepper drive
	Protocol/control	Ethernet
	Code	STDF-EN
	UNIT	VALUE
Operating voltage	[V DC]	24 ± 10 %
Current consumption ¹	[mA]	max. 500
Rotational speed	[rpm]	0 ~ 3000
Supported resolution ²	[ppr]	500, 1000, 1600, 2000, 3600, 5000, 7200, 10000
Input signals		3 dedicated inputs (LIMIT+, LIMIT-, ORIGIN)
		9 programmable inputs (Photocoupler)
Output signals		1 dedicated output (Compare out)
		9 programmable outputs (Photocoupler)
		Brake
Ambient temperature	[°C]	0 ~ +50
Ambient humidity	[%]	35 ~ 80 (non-condensing)
Vibration resistance	[G]	0,5
Duty cycle	[%]	100

¹ Except the motor current.

² For the case that resolution is higher than the encoder's resolution, the motor shall operate by micro-step between pulses.


Port and indicator information

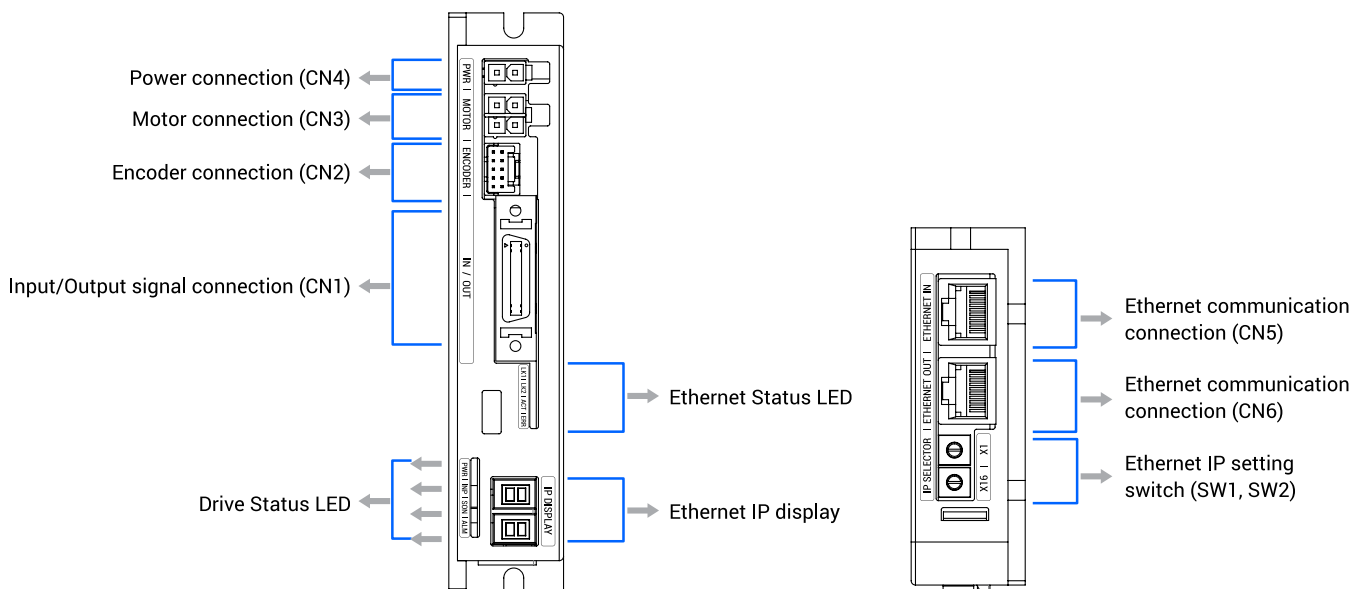

Pin layout


Input/Output signal connector (CN1):

No.	Function	I/O
1	LIMIT+	Input
2	LIMIT-	Input
3	ORIGIN	Input
4	Digital In1	Input
5	Digital In6	Input
6	Digital In7	Input
7	Compare out	Output
8	Digital Out1	Output
9	Digital Out2	Output
10	Digital Out3	Output
11	Digital Out4	Output
12	Digital Out5	Output
13	Digital Out6	Output
14	Digital In2	Input
15	Digital In3	Input
16	Digital In4	Input
17	Digital In5	Input
18	Digital In8	Input
19	Digital In9	Input
20	Digital Out7	Output
21	Digital Out8	Output
22	Digital Out9	Output
23	BRAKE+	Output
24	BRAKE-	Output
25	EXT_GND	Input
26	EXT_24VDC	Input




Encoder connector (CN2):

No.	Function	I/O
1	A+	Input
2	A-	Input
3	B+	Input
4	B-	Input
5	I+	Input
6	I-	Input
7	5 V (DC)	Output
8	GND	Output
9	F.GND	-
10	F.GND	-



Motor connector (CN3):

No.	Function	I/O
1	A+ Phase	Output
2	B+ Phase	Output
3	A- Phase	Output
4	B- Phase	Output





Power connector (CN4):

No.	Function	I/O
1	24 V (DC)	Input
2	GND	Input



Ethernet IP display and settings switch (SW1, SW2):

The value of the fourth digit of Ethernet IP can be set through the setting switch. Set the product's IP not to overlap with other connected products. The first, second and third values of the IP can be set through the GUI. Please refer to the manual for details. When the switch is set to 255 (FF), IP is set automatically, ignoring the setting (DHCP function). The fourth digit of the Ethernet IP is displayed on the 7-Segment display.




X16 | X1
(SW2)(SW1)


Ex) In case of Sw1 : 7 and Sw2 : 5
(5x16) + (7x1) = 87
IP is to be set as 192.168.0.87

Ethernet communication connector (CN5, CN6):

No.	Function
1	TD+
2	TD-
3	RD+
4	-
5	-
6	RD-
7	-
Connection hood	F.GND



External wiring diagram

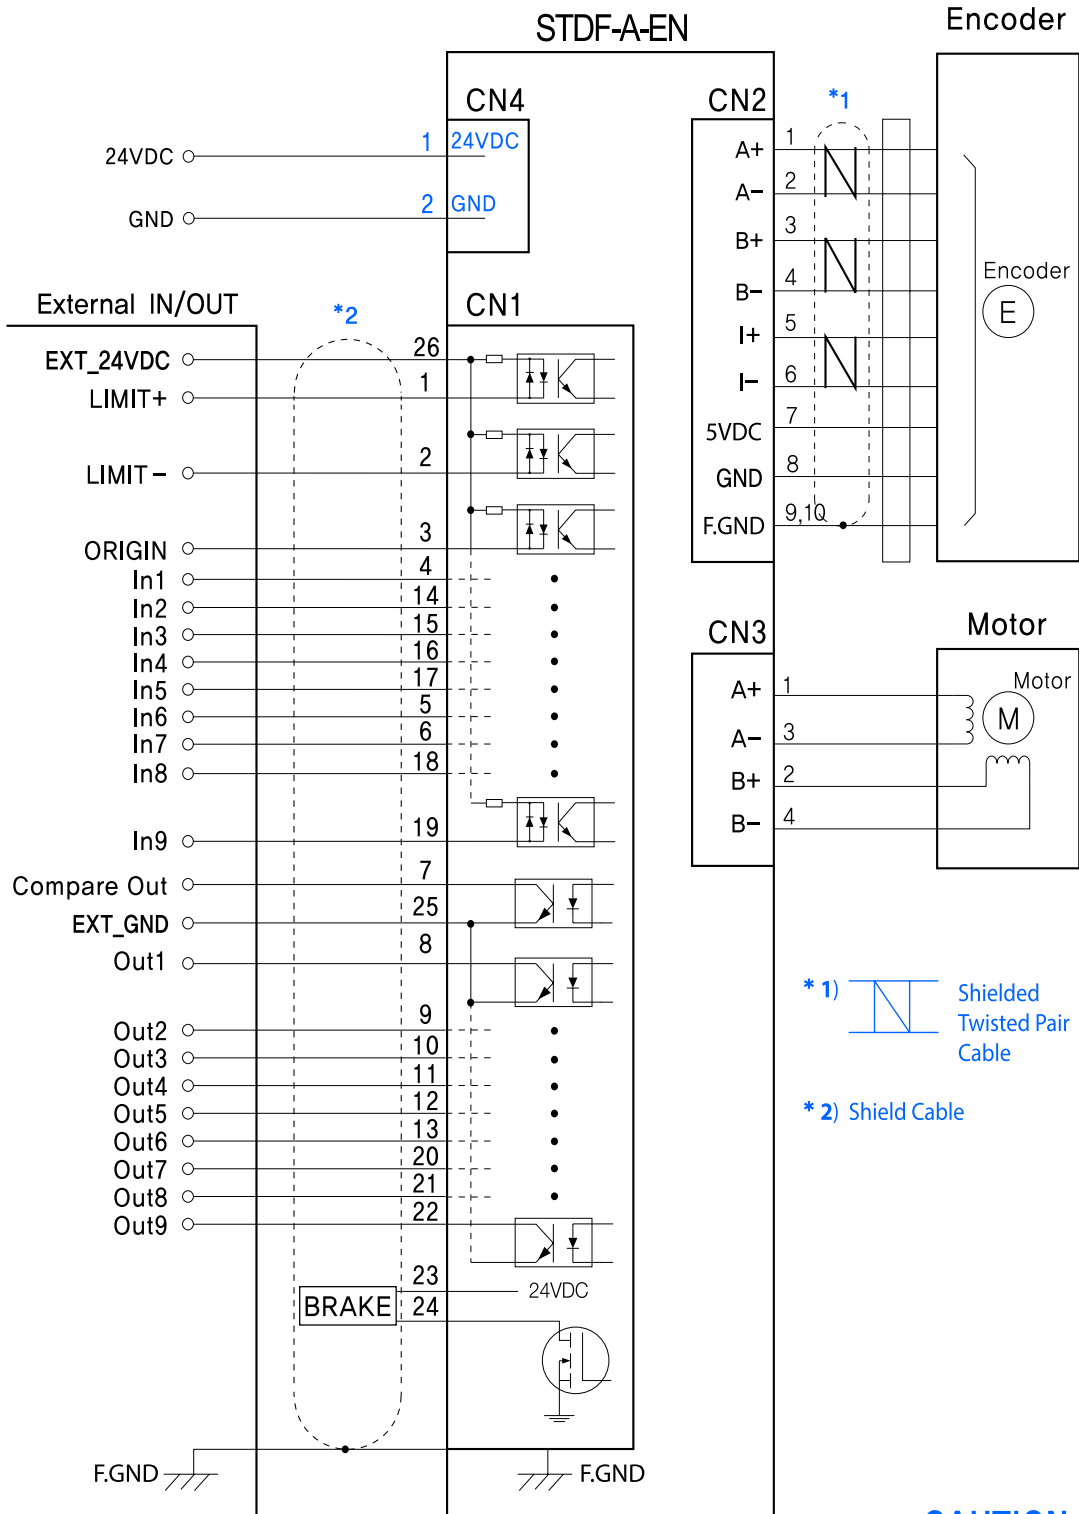

CAUTION

Please refer to the Manual when connecting the motor extension cable.


Carefull connection will be required to protect the drive from any damages.

※When connecting the I/O cables between the controller and drive, please turn off the power of both controller and drive to protect the drive from any damage.

Motors

How to order	21
STMN-42-L-E(-B)	21
STMN-56-L-E(-B)	23


HOW TO ORDER

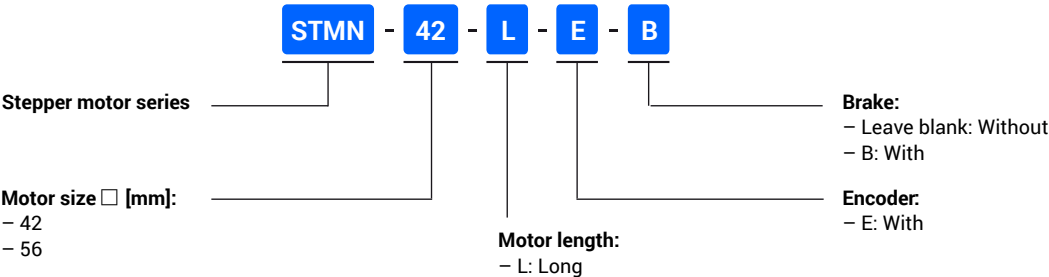

STMN-42-L-E(-B)

Description


NEMA 17 (42 mm) size stepper motor with high torque and M12 connectors offers IP65 protection (except the shaft outlet) and 1.8° step angle (full step). A motor with brake is also available.

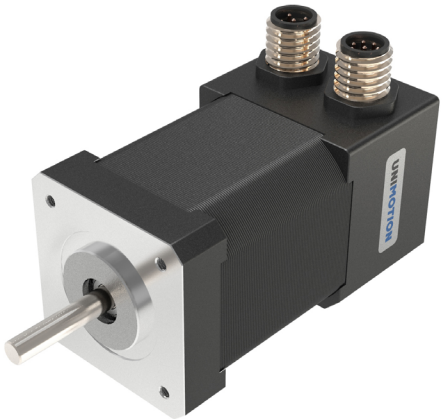


i Motor without the brake is shown.

Dimensions

Motor without a brake:

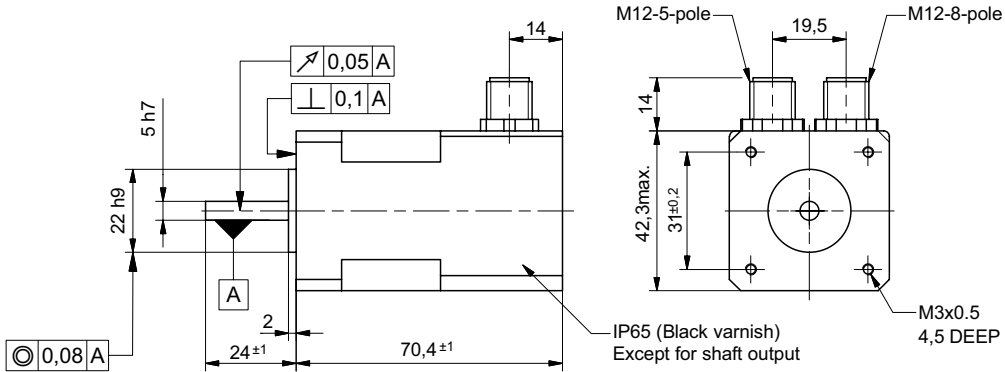

Motor with a brake:

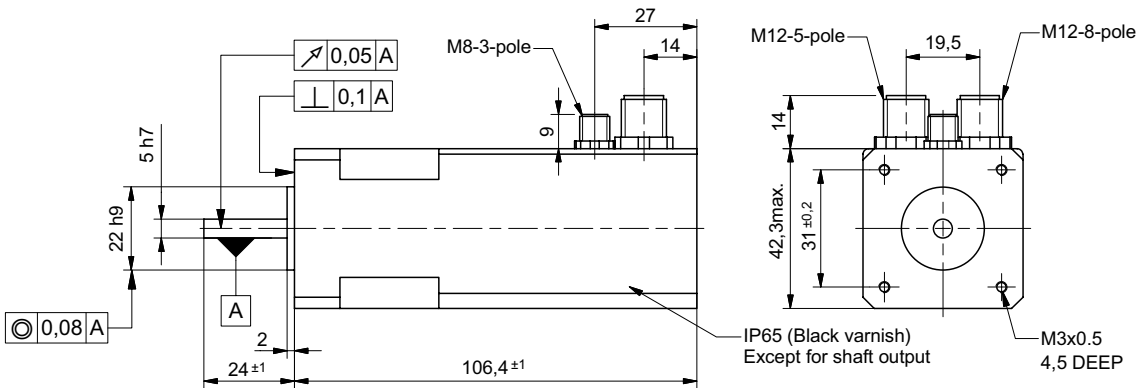

General technical data

	Parameter	Unit	Value
MOTOR	Voltage	[V DC]	3,15
	Current per phase	[A]	1,8
	Mass moment of inertia	[kg cm ²]	0,082 (0,095 ²)
	Holding torque ¹	[Nm]	0,5
	Step angle	[°]	1,8 ± 5 %
	Resistance per phase	[Ω]	1,75 ± 10 %
	Inductance per phase	[mH]	3,3 ± 20 %
	Voltage constant	$\frac{mV}{min^{-1}}$	23
	Mass	[kg]	0,44 (0,57 ²)

¹ For the speed-torque characteristic, please refer to page 6.

² For a motor with brake.

	Parameter	Unit	Value
ENCODER	Type		Incremental
	Measuring principle		Opto-electrical
	Interface		Line drive
	Resolution	[cpr/ppr]	500/2000
	Operating voltage	[V DC]	5


	Parameter	Unit	Value
BRAKE ¹	Operating voltage	[V DC]	24 (+6/-10 %)
	Rated output	[W]	8
	Holding torque	[Nm]	0,4
	Mass moment of inertia	[kg cm ²]	0,013

¹ For a motor with brake.

	Parameter	Unit	Value
OPERATING CONDITIONS	Temperature rise: (Motor standstill; for 2 phase energized)	[°C]	max. 80
	Ambient temperature	[°C]	-10 ~ +50
	Ambient humidity	[%]	max. 85 (non- condensing)
	Protection class		IP65
	Duty cycle	[%]	100
	Insulation resistance	[MΩ]	100
	Insulation class		B (max. 130 °C)
	Dielectric strength	[V AC]	500 for 1 minute

Motor forces


Permissible loads				
Axial load F_a [N]	15			
Distance a [mm]	5	10	15	20
Radial load F_r [N]	50	36	26	20

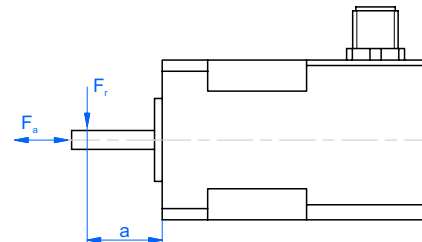

Motor pin allocation

Motor connector


Connector type: M12 5-pole



Pin	Function
1	A-
2	A+
3	B+
4	B-
5	Housing

Encoder connector


Connector type: M12 8-pole



Pin	Function
1	A+
2	A-
3	B+
4	B-
5	GND
6	I-
7	I+
8	VCC (5 V)
Housing	GND/Shielding

Brake connector

Connector type: M8 3-pole



Pin	Function
1	Brake +24 V
3	Brake/GND
4	NC

i Valid only for the motors with brake:
STMN-...-B

STMN-56-L-E(-B)

Description


NEMA 23 (56 mm) size stepper motor with high torque and M12 connectors offers IP65 protection (except the shaft outlet) and 1.8° step angle (full step). A motor with brake is also available.




i Motor without the brake is shown.

Dimensions

Motor without a brake:

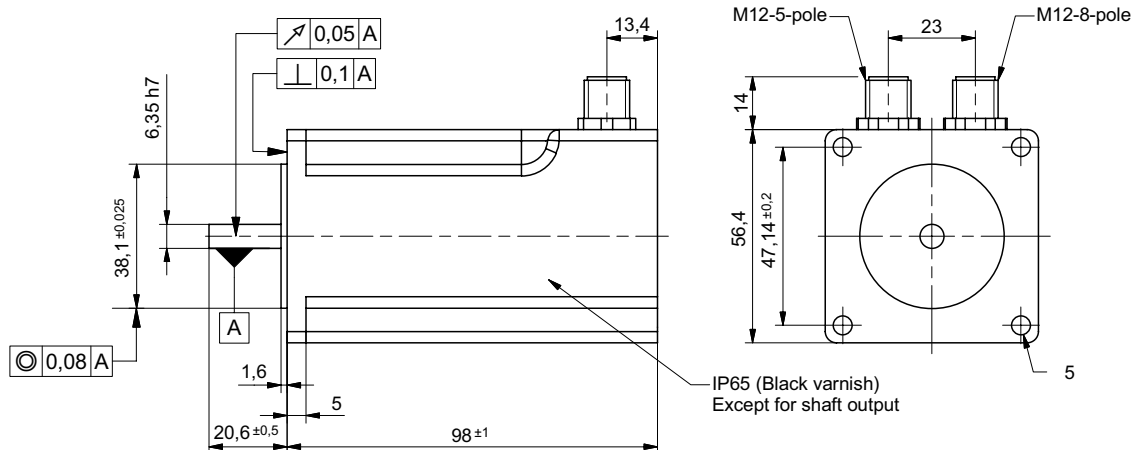

Motor with a brake:

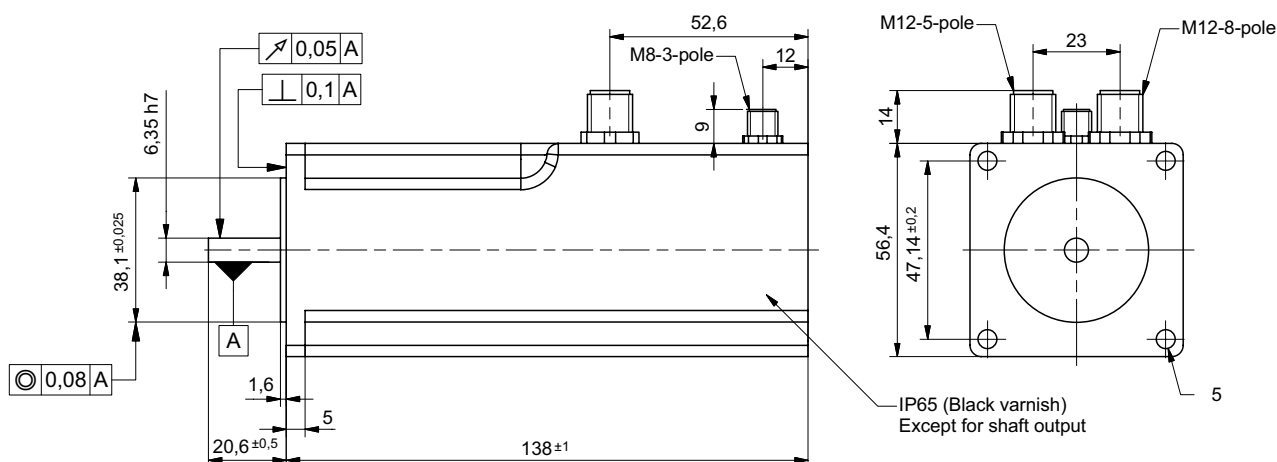

Technical data

	Parameter	Unit	Value
MOTOR	Voltage	[V DC]	2,4
	Current per phase	[A]	4,2
	Mass moment of inertia	[kg cm ²]	0,48 (0,501 ²)
	Holding torque ¹	[Nm]	1,8
	Step angle	[°]	1,8 ± 5 %
	Resistance per phase	[Ω]	0,58 ± 15 %
	Inductance per phase	[mH]	1,9 ± 20 %
	Voltage constant	$\frac{mV}{min^{-1}}$	32,5
	Mass	[kg]	1,14 (1,33 ²)

¹ For the speed-torque characteristic, please refer to page 6.

² For a motor with brake.

	Parameter	Unit	Value
ENCODER	Type		Incremental
	Measuring principle		Opto-electrical
	Interface		Line drive
	Resolution	[cpr/ppr]	500/2000
	Operating voltage	[V DC]	5


	Parameter	Unit	Value
BRAKE ¹	Operating voltage	[V DC]	24 (+6/-10 %)
	Rated output	[W]	10
	Holding torque	[Nm]	1
	Mass moment of inertia	[kg cm ²]	0,021

¹ For a motor with brake.

	Parameter	Unit	Value
OPERATING CONDITIONS	Temperature rise: (Motor standstill; for 2 phase energized)	[°C]	max. 80
	Ambient temperature	[°C]	-10 ~ +50
	Ambient humidity	[%]	max. 85 (non- condensing)
	Protection class		IP65
	Duty cycle	[%]	100
	Insulation resistance	[MΩ]	100
	Insulation class		B (max. 130 °C)
	Dielectric strength	[V AC]	500 for 1 minute

Motor forces


Permissible loads				
Axial load F_a [N]	15			
Distance a [mm]	5	10	15	20
Radial load F_r [N]	130	90	70	52

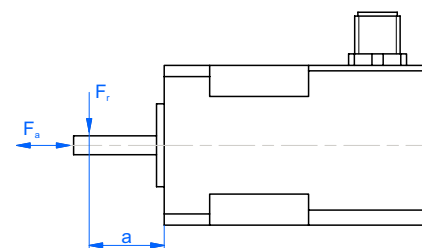

Motor pin allocation

Motor connector


Connector type: M12 5-pole



Pin	Function
1	A-
2	A+
3	B+
4	B-
5	Housing

Encoder connector


Connector type: M12 8-pole



Pin	Function
1	A+
2	A-
3	B+
4	B-
5	GND
6	I-
7	I+
8	VCC (5 V)
Housing	GND/Shielding

Brake connector

Connector type: M8 3-pole



Pin	Function
1	Brake +24 V
3	Brake/GND
4	NC

i Valid only for the motors with brake:
STMN-...-B

Cables

How to order	26
Power cable	27
Signal cable	27
Drive-to-motor cables	29

HOW TO ORDER

Power cables for the stepper drives (only for the STDF drives)

STCF

P

02

Stepper cable series

Type:

P: Power cable

Cable length:

– 02: 2 m

Signal cables for the stepper drives (only for the STDF drives)

STCF

S

EC

02

Stepper cable series

Type:

S: Signal cable

Drive protocol/control:

– EC: EtherCAT

– EN: Ethernet based communication

– PD: Pulse-direction control

Cable length:

– 02: 2 m

Drive-to-motor cables for the stepper motors (only for the STDF drives and STMN motors)

STCF

E

A8

05

Stepper cable series

Type:

– M: Motor cable

– E: Encoder cable

– B: Brake cable

Connector type and size:

A

8

Connector type:

– S: Straight

– A: Angled

Connector size:

– 8: M8

– 12: M12

i

 For possible cable combinations, please refer to the table on page »5«

Cable length:


– 03: 3 m

– 05: 5 m

– 10: 10 m

POWER CABLE

Connection cable between the drive and power supply.

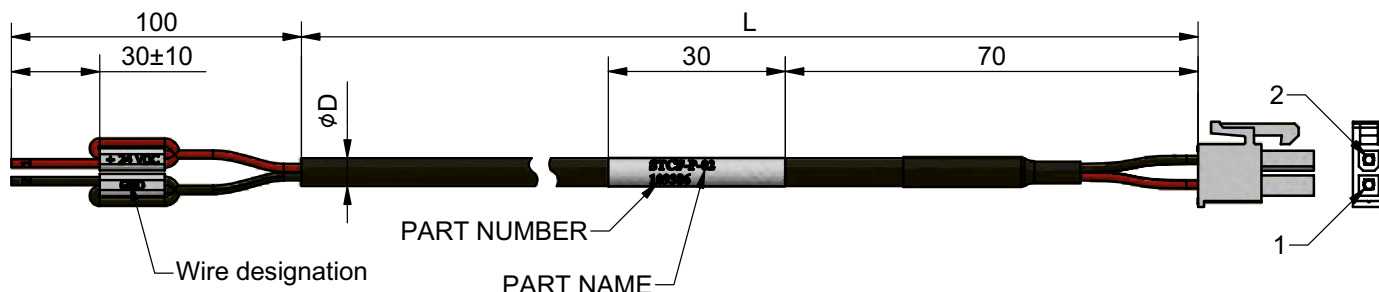

Dimensions	Power cable
	STCF-P-02
L [m]	2
ØD [mm]	4,6

Wire code	Wire designation	Pin number
Red	+24 V DC	1
Black	GND	2

SIGNAL CABLE


Connection cables between the drive and PLC/PC for different protocols.

Dimension	Signal cable		
	STCF-S-PD-02	STCF-S-EC-02	STCF-S-EN-02
L ¹ [m]	2		
ØD ¹ [mm]	6,4	6,4	6,9

¹ For symbol designation see the dimensional drawings of signal cables below.

Pulse-direction

Connection cable between the drive and PLC/PC for Pulse-direction based control.

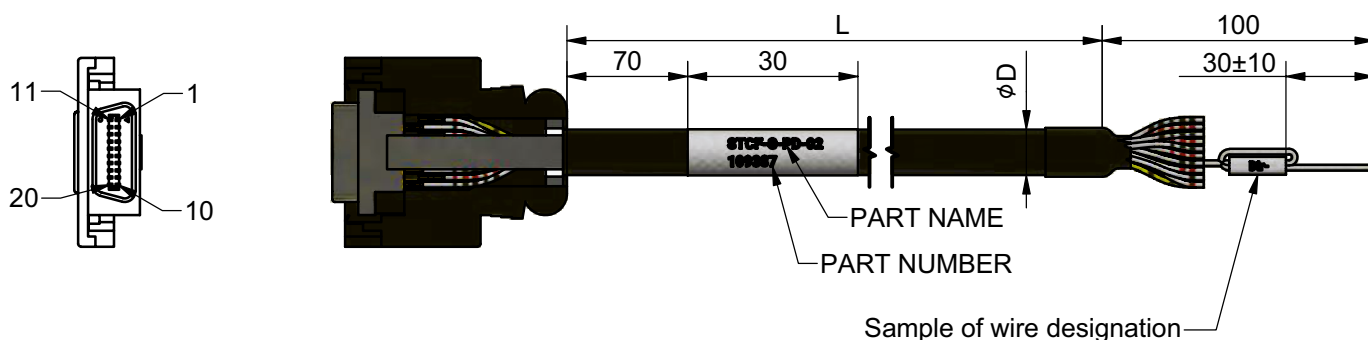


Wire colour code	Wire designation
White, 1 red dot	Pulse+
White, 1 black dot	Pulse-
White, 2 red dots	Dir+
White, 2 black dots	Dir-
White, 3 red dots	A+
White, 3 black dots	A-
White, 4 red dots	B+

Wire colour code	Wire designation
White, 4 black dots	B-
White, 5 red dots	I+
White, 5 black dots	I-
Yellow, 1 red dot	Alarm
Yellow, 1 black dot	InPosition
Yellow, 2 red dots	ServoOff
Yellow, 2 black dots	AlarmRst

Wire colour code	Wire designation
Yellow, 3 red dots	(OCInput)
Yellow, 3 black dots	Brake+
Yellow, 4 red dots	Brake-
Yellow, 4 black dots	GND_S
Yellow, 5 red dots	GND_24 V
Yellow, 5 black dots	24 V DC
Shield	/

EtherCAT

Connection cables between the drive and PLC/PC for EtherCAT communication.

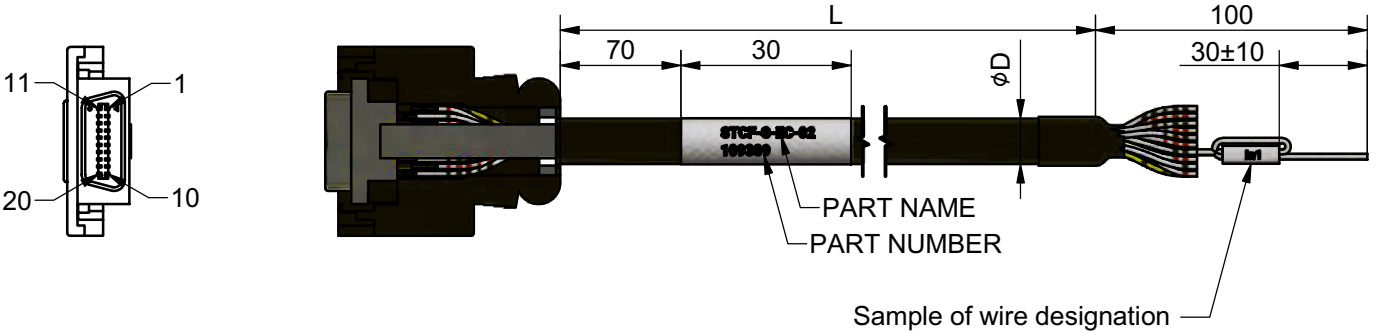


Wire colour code	Wire designation
White, 1 red dot	Limit+
White, 1 black dot	Limit-
White, 2 red dots	Origin
White, 2 black dots	In1
White, 3 red dots	In2
White, 3 black dots	In3
White, 4 red dots	In4

Wire colour code	Wire designation
White, 4 black dots	In5
White, 5 red dots	In6
White, 5 black dots	In7
Yellow, 1 red dot	Out1
Yellow, 1 black dot	Out2
Yellow, 2 red dots	Out3
Yellow, 2 black dots	Out4

Wire colour code	Wire designation
Yellow, 3 red dots	Out5
Yellow, 3 black dots	Out6
Yellow, 4 red dots	Brake+
Yellow, 4 black dots	Brake-
Yellow, 5 red dots	GND_24 V
Yellow, 5 black dots	24 V DC
Shield	/

Ethernet

Connection cables between the drive and PLC/PC for Ethernet communication.

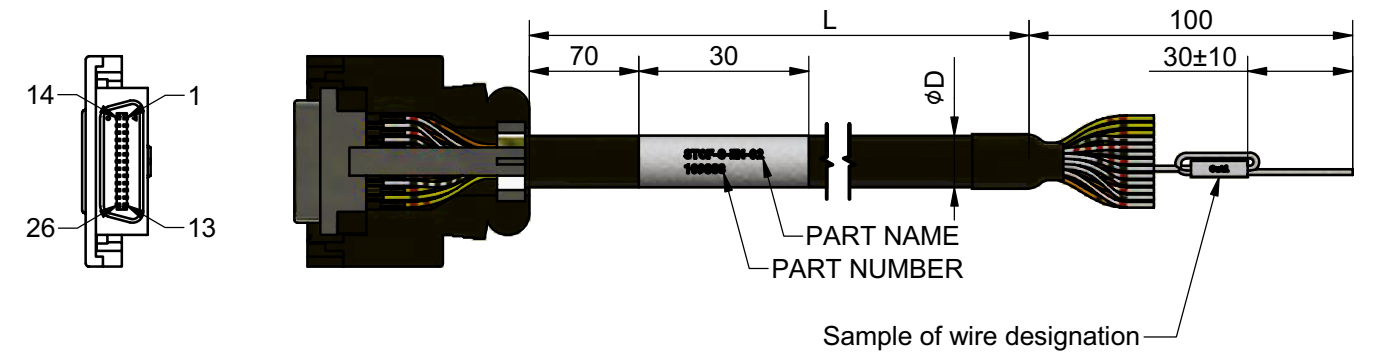

Wire colour code	Wire designation
White, 1 red dot	Limit+
White, 1 black dot	Limit-
White, 2 red dots	Origin
White, 2 black dots	In1
White, 3 red dots	In6
White, 3 black dots	In7
White, 4 red dots	CmpOut
White, 4 black dots	Out1
White, 5 red dots	Out2

Wire colour code	Wire designation
White, 5 black dots	Out3
Yellow, 1 red dot	Out4
Yellow, 1 black dot	Out5
Yellow, 2 red dots	Out6
Yellow, 2 black dots	In2
Yellow, 3 red dots	In3
Yellow, 3 black dots	In4
Yellow, 4 red dots	In5
Yellow, 4 black dots	In8

Wire colour code	Wire designation
Yellow, 5 red dots	In9
Yellow, 5 black dots	Out7
Orange, 1 red dot	Out8
Orange, 1 black dot	Out9
Orange, 2 red dots	Brake+
Orange, 2 black dots	Brake-
Orange, 3 red dots	GND_24 V
Orange, 3 black dots	24 V DC
Shield	/

DRIVE-TO-MOTOR CABLES

Drive-to-motor cables include encoder, motor and brake cables. All the cables are flexible and can be used in combination with energy chains.
Available lengths of the cables are 3 m, 5 m or 10 m.


Technical data

Type	Code	Diameter	Length	Min. bending radius ¹	Temperature range		Oil resistance	Burning characteristic
			[m]	[mm]	Fixed	Flexing		
					[°C]	[°C]		
Encoder	STCF-E-A12-xx	6,7	3/5/10	50,25	-40 ~ +70	+5 ~ +70	Very good - oil rating 60 °C acc. to UL 758	Flame retardant acc. to IEC 60332-1-2
	STCF-E-S12-xx	6,7						
Motor	STCF-M-A12-xx	5,1		38,25				
	STCF-M-S12-xx	5,1						
Brake	STCF-B-A8-xx	4,5		33,72				
	STCF-B-S8-xx	4,5						

¹ Continuous flexing.


Encoder cable

Connection cables between the drive and motor encoder. Available with a straight and angled M12 connector on the encoder side. An angled connector is always positioned towards the shaft of the motor.

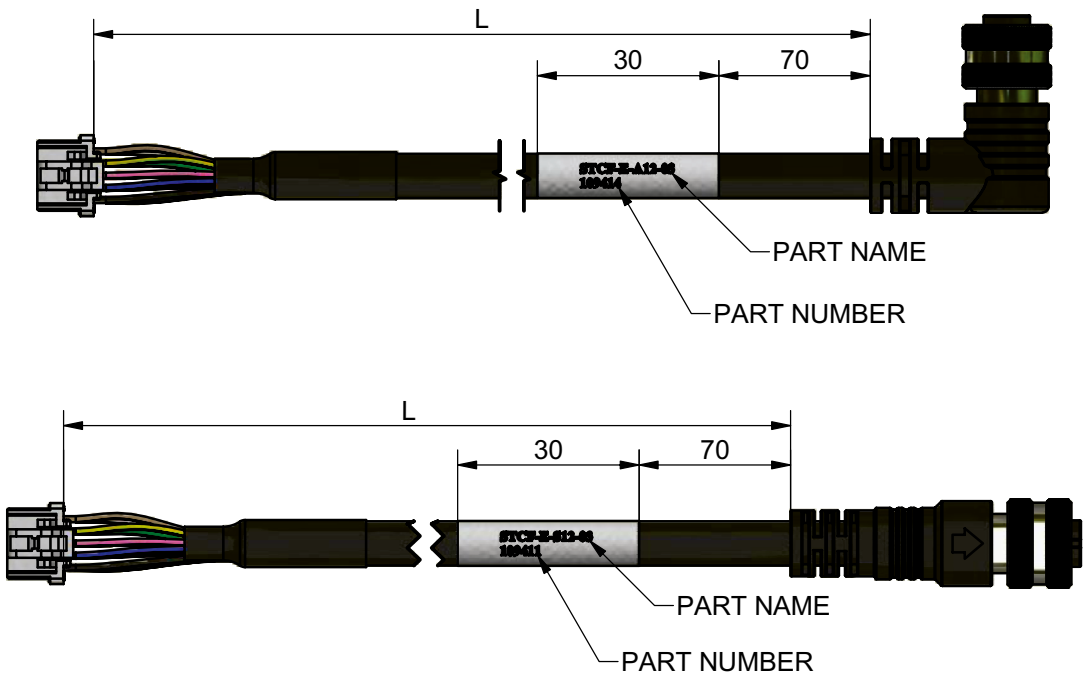


Motor cable

Connection cables between the drive and motor. Available with a straight and angled M12 connector on the motor side. An angled connector is always positioned towards the shaft of the motor.

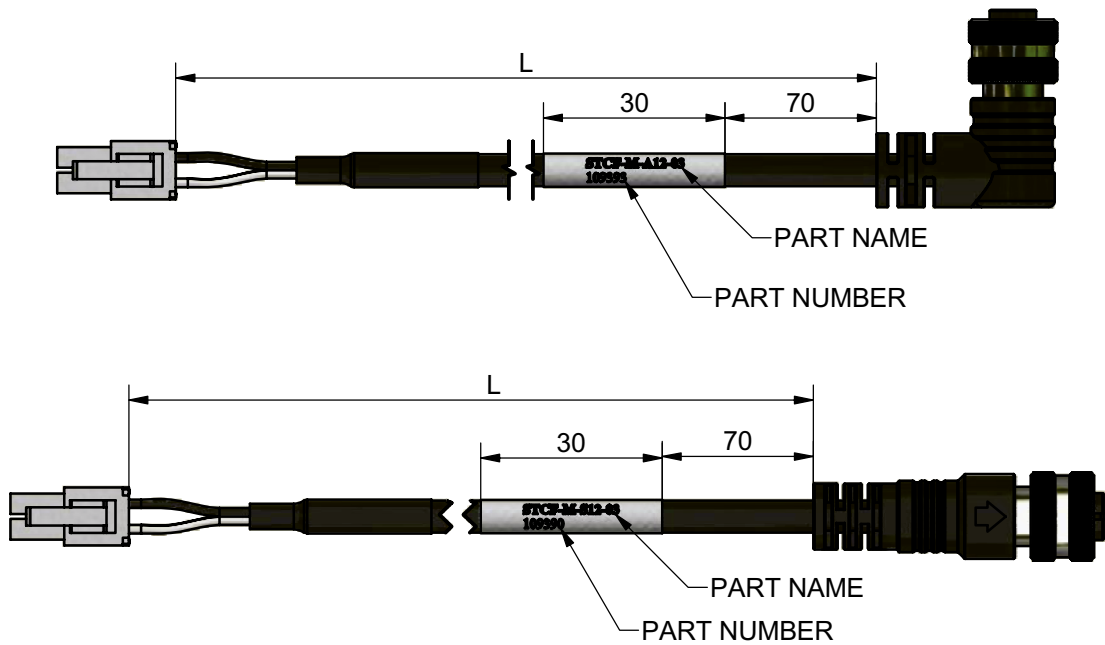

Brake cable

Connection cables between the drive and brake. Available with a straight and angled M8 connector on the motor side. Only for the motors with brake. An angled connector is always positioned towards the shaft of the motor.

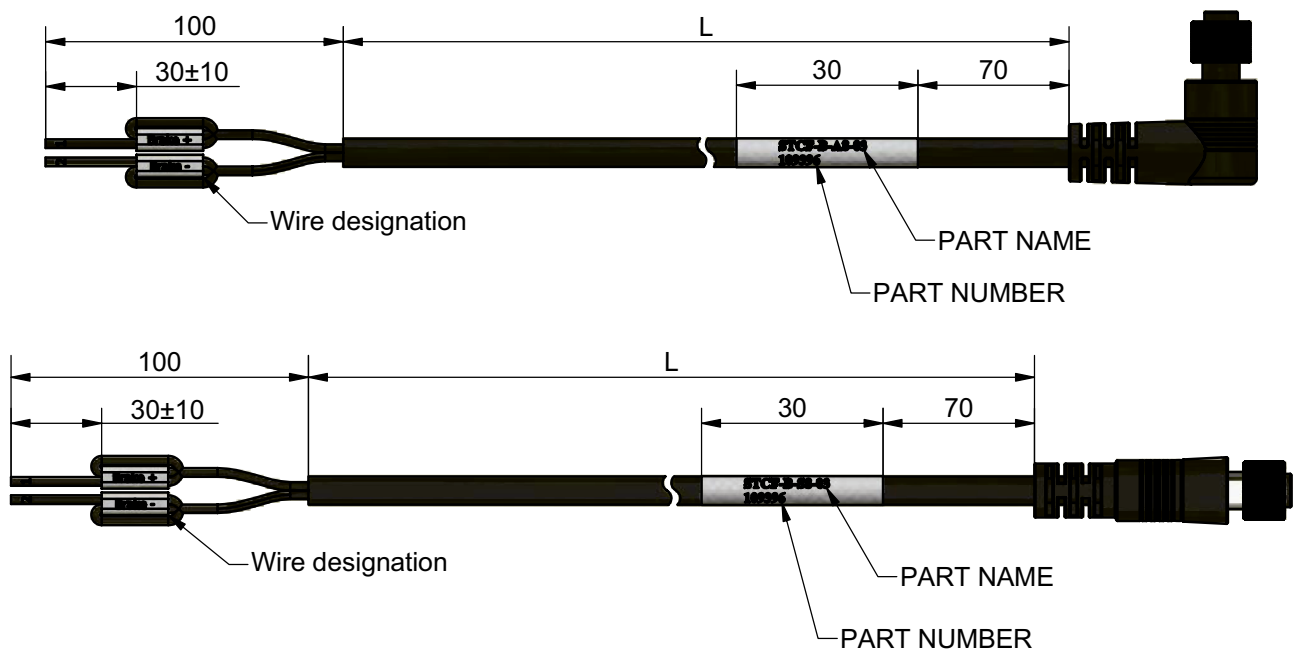

Connector dimensions

In the table below the dimensions of the connector cables in reference to the motors are presented.

Connector size	Straight	Angular	
	L1	L2	L3
M8	47	31	26
M12	55,5	40	23,5

