



SD.18.D-R

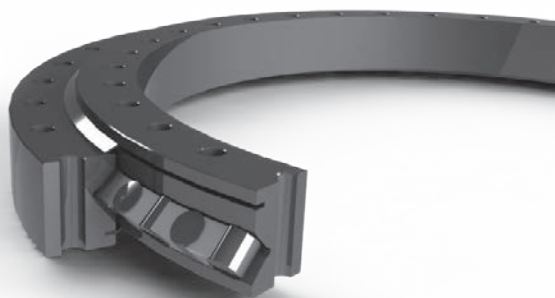

bez ozubení



Otoč bez ozubení

Ložisko se zkříženými válečky



Označení	Rozměry							Upevňovací díry						Hmotnost
	Da	O	U	Di	Ha	Hb	H	La	na	da	Li	ni	di	m
	mm	mm	mm	mm	mm	mm	mm	mm	n°	mm	mm	n°	mm	kg
1 SD.403.18.15.D.1-R	403,5	380	312,0	235	45	45	55	358	24	13	259	28.I	13	25
2 SD.562.18.15.D.1-R	562,0	560	491,5	418	50	50	60	538	30	14	440	30	14.I	40
3 SD.589.18.15.D.1-R	589,5	565	477,5	385	60	58	75	540	36	16	410	36-1	16	61
4 SD.695.18.15.D.1-R	695,0	670	577,0	480	64	57	77	640	36	18	508	36-1	18	80

G = N°4 × mazací hlavice DIN 71412 AM 8×1 stejně rozložené.

Požádejte o podrobný výkres ložiska, hodnoty se mohou lišit.

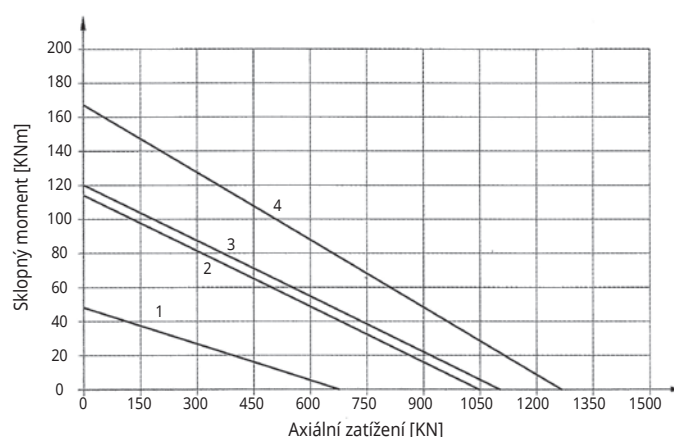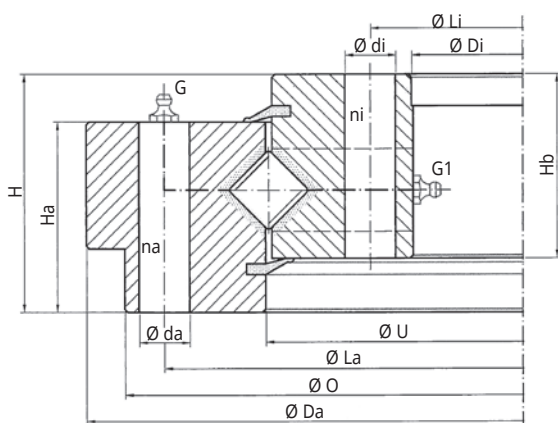

SD.25-30.D-R

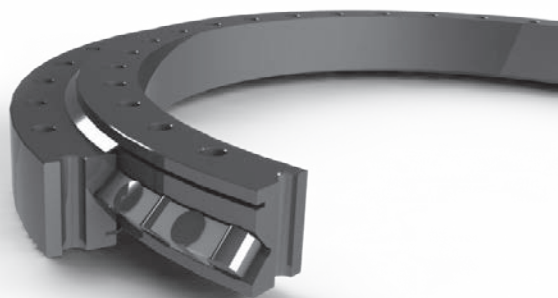

bez ozubení

Otoč bez ozubení

Ložisko se zkříženými válečky

Označení		Rozměry					
		Da	O	U	Di	Ha	Hb
		mm	mm	mm	mm	mm	mm
1	SD.500.25.15.D.1-R	500	495	403	307	63	63
2	SD.816.25.15.D.1-R	816	781	682	574	73	67
3	SD.864.25.15.D.3-R	864	833	768	678	73	68
4	SD.979.30.15.D.1-R	979	932	845	718	79	82
5	SD.1345.30.15.D.1-R	1345	-	1223	1115	85	85

Označení		Upevňovací díry					Hmotnost
		La	na	da	Li	ni	m
		mm	n°	mm	mm	n°	kg
1	SD.500.25.15.D.1-R	466	30	18	336	30.I	52
2	SD.816.25.15.D.1-R	753	18	22	604	18	133
3	SD.864.25.15.D.3-R	802	24	M16	706	24	115
4	SD.979.30.15.D.1-R	893	36	22	753	36	183
5	SD.1345.30.15.D.1-R	1290	36	22	1150	42	311

G = N°4 × mazací hlavice DIN 71412 AM 8×1 stejně rozložené.

Požádejte o podrobný výkres ložiska, hodnoty se mohou lišit.

