


Označení	Rozměry [mm]														Hmot. [kg]
	$\varnothing D$	$\varnothing d^{+0,00/-0,05}$	$\varnothing D1$	$\varnothing D2$	C	C1	C2	B	M	M1	$N^{+0,00/-0,25}$	W	X	\varnothing Vrtání pro čep rolny	
HPJE 26	26	13	17,1	35	20,0	0,8	5,0	23,0	M10 × 1,0	13,0	10,00	0,5	4	13,02	0,14
HPJE 30	30	15	17,5	40	20,0	0,8	5,0	25,0	M12 × 1,5	14,0	11,00	0,5	4	15,02	0,17
HPJE 32	32	15	17,5	42	22,0	0,8	5,0	25,0	M12 × 1,5	14,0	11,00	0,5	4	15,02	0,20
HPJE 35	35	20	23,8	46	22,0	0,8	5,0	32,5	M16 × 1,5	18,0	14,50	1,0	8	20,02	0,23
HPJE 40-1	40	22	28,5	54	27,6	1,6	7,8	36,5	M18 × 1,5	20,5	16,00	1,0	8	22,02	0,35
HPJE 50	50	24	32,0	68	40,0	1,6	14,0	50,0	M16 × 2,0	32,0	18,00	1,0	8	24,02	0,94
HPJE 62-1	62	28	43,0	78	44,0	1,6	14,0	49,5	M24 × 1,5	27,5	22,00	1,0	8	28,02	1,13
HPJE 76	76	35	50,0	98	52,0	1,6	14,0	70,0	M24 × 1,5	41,0	29,00	1,5	8	35,02	2,31
HPJE 90	90	35	50,0	112	52,0	1,6	14,0	70,0	M24 × 1,5	41,0	29,00	1,5	8	35,02	3,09
HPJE 100	100	35	50,0	125	52,0	1,6	14,0	70,0	M24 × 1,5	41,0	29,00	1,5	8	35,02	3,79
HPJE 125	125	64	82,5	148	76,0	1,6	18,0	105,0	M48 × 5,0	55,0	50,00	1,5	12	64,02	9,28
HPJE 150	150	80	92,0	173	76,0	1,6	18,3	140,0	M64 × 6,0	75,0	65,00	1,5	12	80,02	14,86

Matky a podložky nejsou součástí dodávky.

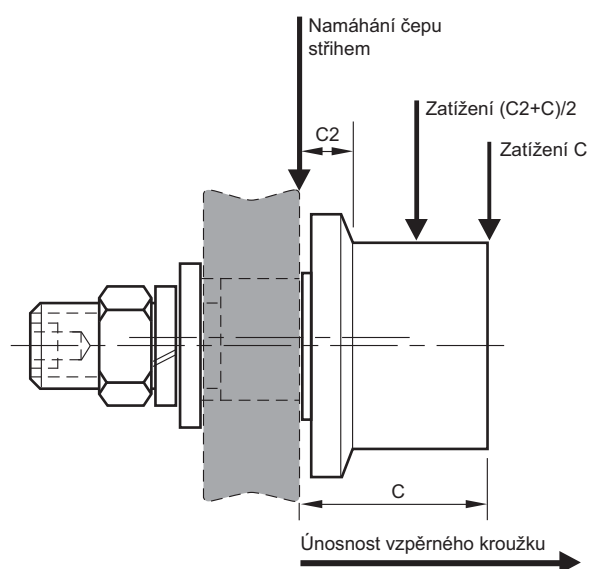

	Únosnost [N]									Únosnost vzpěrného kroužku [N]
	Radiální zatížení rolny			Axiální zatížení rolny			Únosnost čepu			
	3000 hod. L ₁₀ při 100 ot./min	500 hod. L ₁₀ při 33 1/3 ot./min	Max. radiální zatížení, statické	3000 hod. L ₁₀ při 100 ot./min	500 hod. L ₁₀ při 33 1/3 ot./min	Max. axiální zatížení, statické	V ohybu = 0,75 S _y		Ve stříhu	
							Zatížení (C2+C)/2	Zatížení C		
1060	2790	1000	650	1720	1350	1560	900	8700	2090	
1060	2790	1000	650	1720	1350	1560	900	8700	2090	
2290	6000	2680	1410	3700	1950	2950	1670	14400	2090	
2290	6000	2680	1410	3700	1950	2950	1670	14400	2090	
4670	12200	4900	2890	7560	2650	4990	3560	25470	2090	
6450	17000	7200	4030	10600	3050	12040	7740	51750	4050	
8800	23100	10100	5400	14200	6850	12160	8750	64850	5960	
26700	63600	89000	10800	25700	53400	22670	15160	104040		
26700	63600	89000	10800	25700	53400	22670	15160	104040		
26700	63600	89000	10800	25700	53400	22670	15160	104040		
62200	148100	230800	24600	58500	144600	117220	75420	411800		
67000	159000	251000	26500	63000	147000	270280	171880	720520		

Velikosti \varnothing D26-62 mají kuličkový typ ložiska, \varnothing D72-150 mají kuželíkový typ ložiska.