



## Ozubené hřebeny s přímým ozubením

Tolerance roztečí +/- 30 µm na 500 [mm]


Stupeň kvality ozubení je od 8 do 9 a je dle DIN 3962/63/67

Úhel záběru 20°

Materiál: ocel C40, UNI 7845



Modul	hp	he x S	L							
			500		1000		2000		3000	
			Typ	[Kg]	Typ	[Kg]	Typ	[Kg]	Typ	[Kg]
<b>1</b>	14	15x15	CR26050	0,82	CR26100	1,5	CR26200	3,1	CR26300	4,9
<b>1,5</b>	15,5	17x17	CR27050	1,0	CR27100	2,0	CR27200	4,0	CR27300	6,1
<b>2</b>	18	20x20	CR28050	1,4	CR28100	2,7	CR28200	5,4	CR28300	8,4
<b>2,5</b>	22,5	25x25	CR29050	2,1	CR29100	4,3	CR29200	8,6	CR29300	11,9
<b>3</b>	27	30x30	CR30050	3,1	CR30100	6,3	CR30200	12,5	CR30300	18,6
<b>4</b>	21	25x25	CR36050	1,8	CR36100	3,65	CR36200	7,3	CR36300	10,9
<b>4</b>	26	30x30	CR33050	3,05	CR33100	6,0	CR33200	11,9	CR33300	18,1
<b>4</b>	36	40x40	CR31050	5,5	CR31100	11,1	CR31200	22,0	CR31300	31,3
<b>5</b>	45	50x50	CR32050	8,3	CR32100	17,5	CR32200	34,6	CR32300	45,3
<b>6</b>	54	60x60	CR34050	12,65	CR34100	25,0	CR34200	51,0	-	-
<b>8</b>	72	80x80	CR39050	21,4	CR39100	42,7	CR39200	85,4	-	-

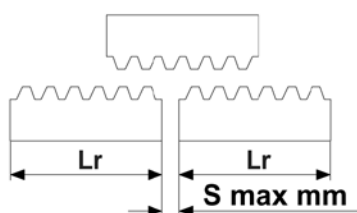

## Ozubené hřebeny pro skládání do nekonečných délek

Modul	Rozteč [mm]	S	L							
			500		1000		2000		3000	
			Z	Lr	Z	Lr	Z	Lr	Z	Lr
<b>1</b>	3,1416	0,5	159	449,51	318	999,02	636	1998,05	955	3000,22
<b>1,5</b>	4,7124	0,6	106	449,51	212	999,02	424	1998,05	637	3001,79
<b>2</b>	6,2832	0,6	80	502,65	159	999,02	318	1998,05	478	3003,36
<b>2,5</b>	7,854	0,7	64	502,65	127	997,45	255	2002,77	382	3000,22
<b>3</b>	9,4248	0,8	53	499,51	106	999,02	212	1998,05	319	3006,51
<b>4</b>	12,5664	0,8	40	502,65	80	1005,31	159	1998,05	239	3003,36
<b>5</b>	15,708	1,0	32	502,65	64	1005,31	128	2010,31	191	3000,22
<b>6</b>	18,8496	1,0	27	508,93	53	999,02	106	1998,05	-	-
<b>8</b>	25,1328	1,0	20	502,65	40	1005,31	80	2010,62	-	-