


Ozubené hřebeny s přímým ozubením KRUHOVÉ

Materiál: ocel C40, UNI 7845

Úhel záběru 20°

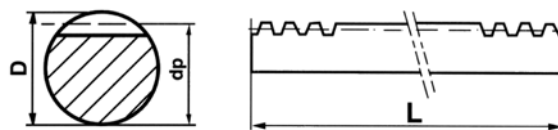


Typ	Modul	Dh7	dp	L	Kg
CR26200-C	1	10	9	2000	1,1
CR27200-C	1,5	15	13,5	2000	2,66
CR28200-C	2	20	18	2000	4,62
CR29200-C	2,5	25	22,5	2000	6,76
CR30200-C	3	30	27	2000	10,24
CR31200-C	4	40	36	2000	18,18
CR32200-C	5	50	45	2000	27,08

Ozubené hřebeny s přímým ozubením PLASTOVÉ

Materiál: Hostaform C (polyacetal)

Úhel záběru 20°

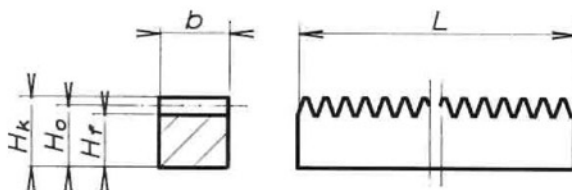

Typ	Modul	Hk	Ho	Hf	b	L
ZH 0525	0,5	4,5	4,0	3,4	4,0	cca. 250
ZH 0525S	0,5	6,0	5,5	4,9	4,0	cca. 250
ZH 0725	0,7	6,7	6,0	5,1	6,0	cca. 250
ZH 1025	1,0	9,0	8,0	6,8	9,0	cca. 250
ZH 12525	1,25	11,0	9,75	8,3	10,0	cca. 250
ZH1525	1,5	12,0	10,5	8,75	12,0	cca. 250
ZH 2025	2,0	11,0	9,0	6,6	15,4	cca. 250
ZH 3025	3,0	15,0	12,0	8,5	19,4	cca. 250